

THE SCIENCE

ACR

OF SURVIVAL



ACR C-Strobe™ & C-Strobe™ H₂O

Personal Distress Strobe



LED Strobe Light

The compact, rugged and waterproof C-Strobe and C-Strobe H₂O are USCG/SOLAS approved and have a 45 lumen LED that operates typically for 120 hours continuously in strobe mode.

USCG+
SOLAS
Approved



ACR C-Strobe™ & C-Strobe™ H₂O

Manual/Water-Activated Emergency Signaling Lights

More About the C-Strobe™ series:

The new C-Strobe and C-Strobe H₂O personal distress strobe lights combine intense LED technology with increased operating life to provide you with the ultimate strobe distress lights. These personal distress strobe lights feature an impact resistant case – making them reliable, multi-purpose lights whenever efficient distress lighting is needed.

The C-Strobe is activated manually with an easy twist On/Off activation and the C-Strobe H₂O model includes two activation methods; the light can easily be activated with a simple push of the On/Off button or when in the armed position, can be activated automatically when immersed in water. The feature rich C-Strobe H₂O model also boasts 3 modes of operation; strobe, steady-on, and SOS.

The slim, lightweight and versatile design of these lights allows them to fit easily in a pocket or hang discreetly when attached to a life jacket or backpack. The flexible lashing loops on the side of the products allow for multiple mounting options including the webbing on your backpack or straps on your life jacket. The Velcro® strap can be secured around the lashing loops and creates

countless additional mounting possibilities. The lights also come with a clip designed to conveniently slide over your inflatable life jacket's oral inflation tube for storing your light inside your life jacket.



**USCG+
SOLAS
Approved**



LED Strobe Light



Fresh or Salt Water Activated (C-Strobe™ H₂O Only)




Manual Deactivation




120+ Hours

SPECIFICATIONS

| | C-Strobe | C-Strobe H ₂ O |
|--|---|--|
| ACR Product Number | 3965 (Bulk) / 3965.1 (Carded) | 3964 (Bulk) / 3964.1 (Carded) |
| Size | 5.06 x 1.38 x 1.2 inches (12.85 x 3.5 x 3.0 cm) | 5.56 x 1.38 x 1.2 inches (14.1 x 3.5 x 3.0 cm) |
| Weight | 1.2 oz (33 g) | 1.4 oz (40 g) |
| Operation | Manual Twist On/Off | Manual On/Off Button or Water Activation |
| Activation Method | Manual Activation Only | Water or Manual Activation |
| Waterproof | Tested for 24 hrs @ 3.3 ft (1m) | Tested for 24 hrs @ 3.3 ft (1m) |
| Lamp | 45 Lumen White LED | 45 Lumen White LED |
| Certification | USCG/SOLAS, CE, Transport Canada | USCG/SOLAS, CE, Transport Canada |
| Light Type | Strobe | Strobe / Steady-On / SOS |
| Minimum Performance (+ 0.75 CD) | >100 hr at -1 °C (strobe mode) | >100 hr at -1 °C (Strobe Mode) |
| Typical Performance (+ 0.75 CD) | >120 hr at 30 °C (strobe mode) | >120 hr at 30 °C (Strobe Mode) |
| Battery | 2 AA Batteries | 2 AA Batteries |
| Reverse Battery Protection | Yes | Yes |
| Accessories (with carded version) | PFD Clip, Lanyard, Velcro Strap | PFD Clip, Lanyard, Velcro Strap |

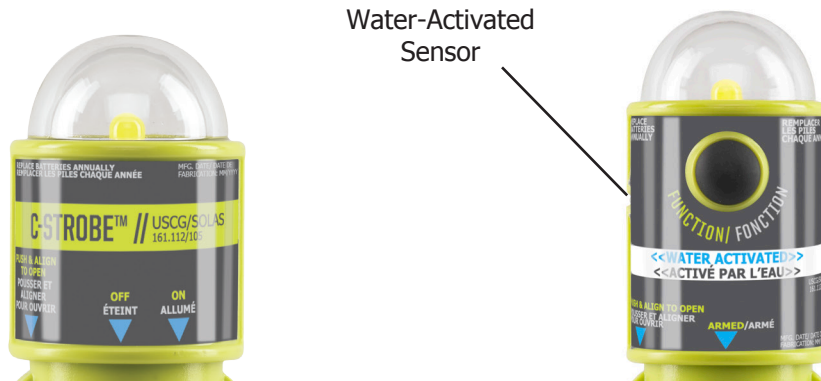

Water-Activated Sensor

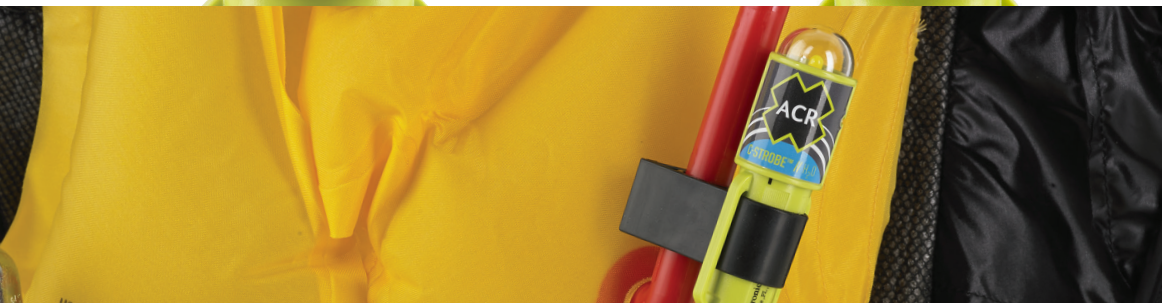

For further information please contact:

ACR Electronics, Inc.
5757 Ravenswood Road
Fort Lauderdale, FL 33312

Tel: (954) 981.3333

Fax: (954) 983.5087

Email: sales@acrartex.com