



For vessels up to 20m



71307


71308



Code	71307	71308
Housing	Black	White

**FOS LED 12 & 20
All-Round light 360°**

- For vessels up to 20m
- Visible distance: 2 nm
- 12-24 V DC & 1,5W
- White LED light
- Deck Mounted
- Last for 50.000 hours
- Waterproof, non-corrosive, non-magnetic
- Included:
 1. Screw DIN7981 / ISO 7049 M3.5x32mm
 2. Wire length 0.6m
 3. Double-side adhesive sticker that can be used as drilling drawing
- Weight: 95gr/pc

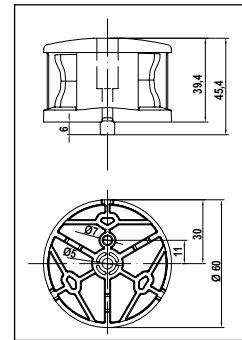

Dimensions are in mm

CLASSIC LED

The **Classic LED** series of navigation lights is designed for vessels up to 12m or 20m. Made of tough UV stabilized ABS polycarbonate compound with shatter-proof acrylic lens, stainless steel electrical contacts and nitrile water resistant seal to provide reliable long-life. All CLASSIC LED are supplied with encapsulated in silicon 12-24V LED bulb to ensure maximum energy saving, protection against humidity and a long lifetime of 50.000 hours.

Meet the requirements for:

- COLREG 72
- MSC 253(83)
- EN 14744:2005

For vessels up to 12m



**CLASSIC LED 12
All around lights 12/24V**

All round lights are screw mounted on the mast as high as possible and are connected to the central or auxiliary circuit.




72164

72167



- For vessels up to 12m
- Visible distance: 2nm
- 12/24V DC & 2W
- White LED light or tri-colour
- Deck mounted
- Waterproof, non corrosion, non magnetic

Code	72164	72167
Description	White	Tri-colour
Housing	Black	



**Classic LED 12 Bulb (BA15S)
for All-around lights
12/24V**

Code...72182

**CLASSIC LED 12
Port - Starboard - Stern - Masthead - Bicolor light**



72168

72169

72170


72171

72172



- For vessels up to 12m
- Visible distance:
 - Port - Starboard - Bicolor: 1nm
 - Stern - Masthead: 2nm
- 12/24V DC & 2W
- Vertical mounted
- Waterproof, non corrosion, non magnetic

Code	72168	72169	72170	72171	72172
Description	Starboard Green 112,5°	Port Red 112,5°	Stern White 135°	Masthead White 225°	Bi-colour 225°
Housing	Black				

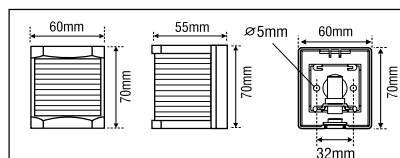

**Classic LED Kit 12
12/24V**

Code...72183